



Nuova Rade

Marine - Plastics Technology Experts


Assembling Instructions

31349 – Shower Sump System Unit, Lsu 600, 12V



Step 1:

Take the product off the carton box.

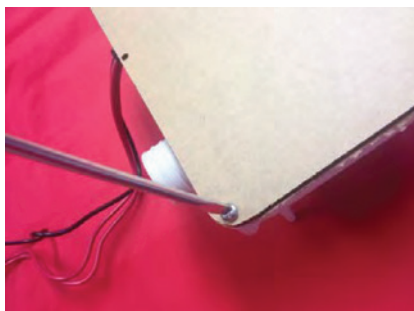

Step 2:

Unscrew the top acrylic lid until you see the inner components of the product.



The Shower Sump System Unit includes an automatic pump, an outlet, a fixing clamp, an o-ring, a non-return valve, a plastic net for filtration and a warning label.



Step 3:

Remove the filtration net from the base to have clear access to the pump.




Step 4:

Remove the pump from the base of the Sump System and remove the Grey Plastic Cover from the pump.



Step 5:

Remove the protecting white foam for the floatation mechanism to operate. Close back when foam removed.

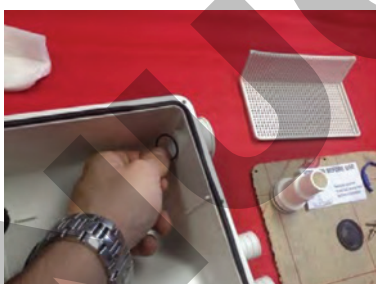

Step 6:

Place the O-Ring on the inner side of the outlet as shown on the picture. Then place the pump back to its position applying slight strength for best fitment.



Step 7:

Locate the three wires of the pump and mark the MIDDLE RED as the automatic positive (+) and the BOTTOM RED as the manually operated positive (+). BLACK is for negative (-).



Step 8:

Notice the FLAT surface of the Non-return valve and insert it on the outlet's adapter facing inwards as on the picture. The ribbed part faces outwards.



Nuova Rade

Marine - Plastics Technology Experts


Assembling Instructions

31349 – Shower Sump System Unit, Lsu 600, 12V




Step 9:

Insert the Outlet and Fix the blue Clamp. Note that the Clamp must be inserted fully inside the referring sockets of the adapter.

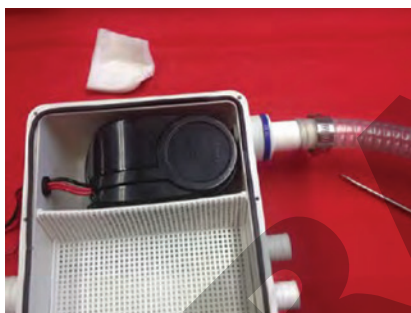

Step 10:

Assemble the hose to the outlet and attach a metallic clamp if needed. Put the filtration net back to position and screw back the acrylic lid.



Step 11:

The product is ready to operate according to the connection type chosen at **step seven**.

Nuova Rade
Marine - Plastics Technology Experts

Attention before use

Before installation please remove the foam protector

Easy to disassemble for installation and cleaning

Test knob
Foam protector
Impeller guard
Remove screw
Depress tabs